
Portable radio
AE 6565

Portable radio

Auto headphone winder
 Headphones can be automatically wound for convenient storage when not in use.

- FM stereo and MW (AM) reception
 Gives you a listening choice of radio stations in high-quality stereo
 FM and AM reception
- Pocket-size for portable use
 Combines high performance with portable convenience wherever you go.
- **Dynamic bass boost**Enhances bass tone frequencies to give deep, rich sounds.
- Slim, compact design



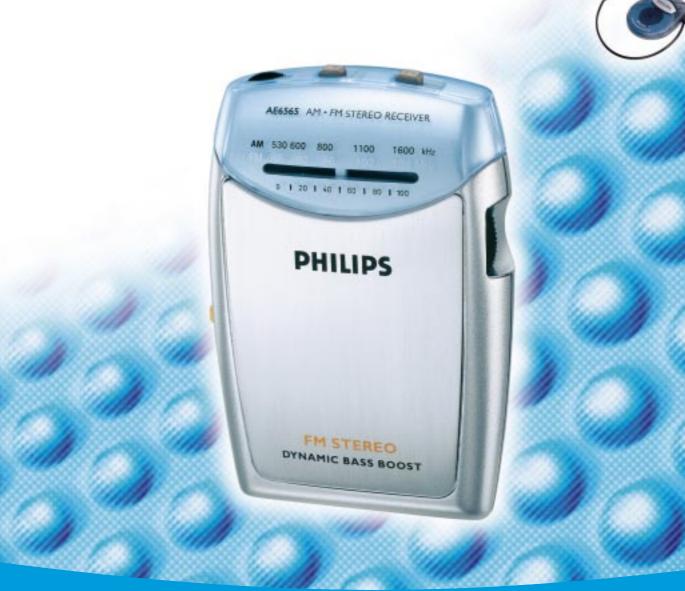



Standard product information

Tuner

· Analogue tuning

• Wavebands : AM/FM stereo • Frequency ranges : FM 87.5 - 108 MHz

: MW 525 - 1606.5 kHz (571 - 187 m)

Ferroceptor for MWFM aerial in-earphone

Amplifier

• Max. output power : 2 x 5 mW RMS

• Dynamic bass boost (2 position)

Power supply

• Batteries : 2 x 1.5V, type AAA/R03/UM4

Connections

• Headphone socket : 3.5mm

General

• Material : polystyrene

• Weight : 55 g (excluding batteries)
• Dimensions : 62 mm W x 93 mm H x 18 mm D

Quantity/ dealer carton : 6 Quantity/ master carton : 12



Product highlights

• Stereo In-earphones

In-earphones set provides excellent stereo reproduction for maximum music enjoyment

Dynamic bass boost

Enhances bass tone frequencies to give deep, rich sounds.

1999-12-10 Printed in Hong Kong Subject to modification without notice © 1999 Royal Philips Electronics All Rights Reserved.

http://www.philips.com



